

50A

50A Glass Passivated Single-Phase Bridge Rectifier

Features


Mechanical Data






---

Type	VRRM V	VRSM V
------	--------	--------

Derating Curve For Output Rectified Current

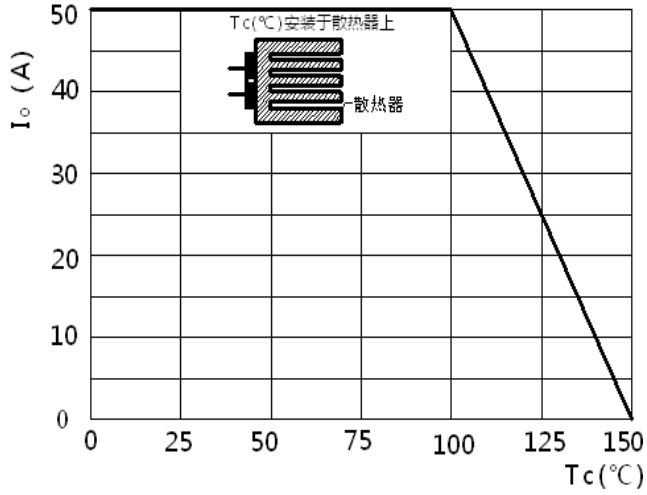

Maximum Non-Repetitive Peak Orward Surge Current Per Bridge Element

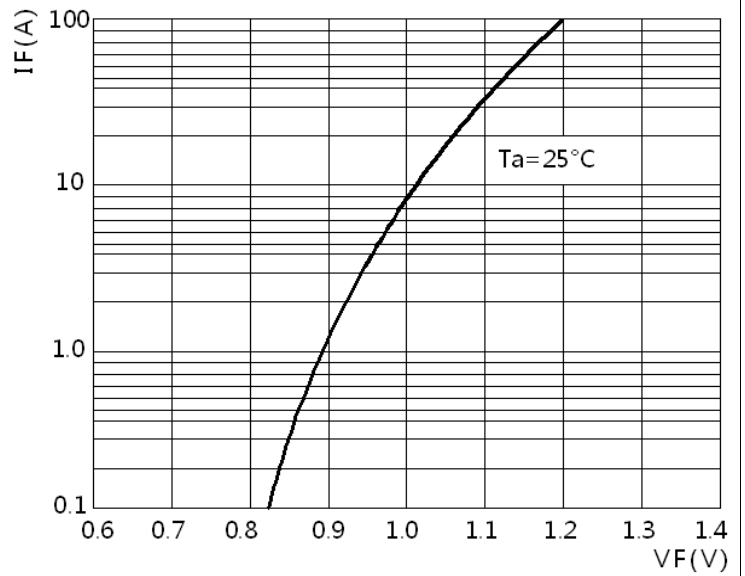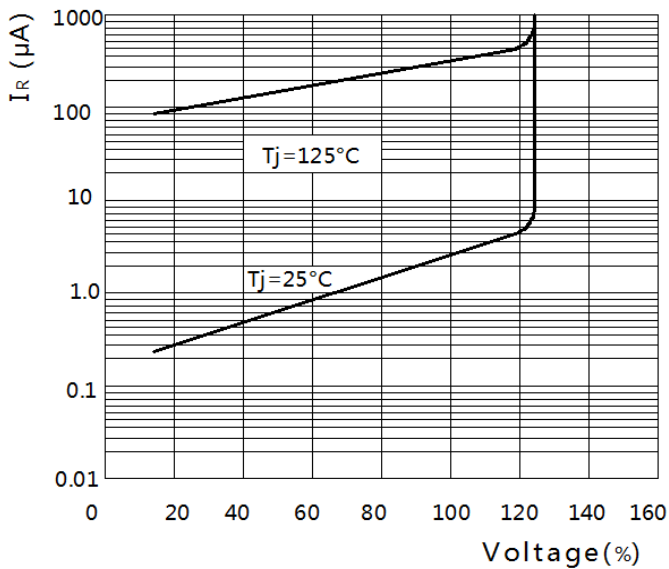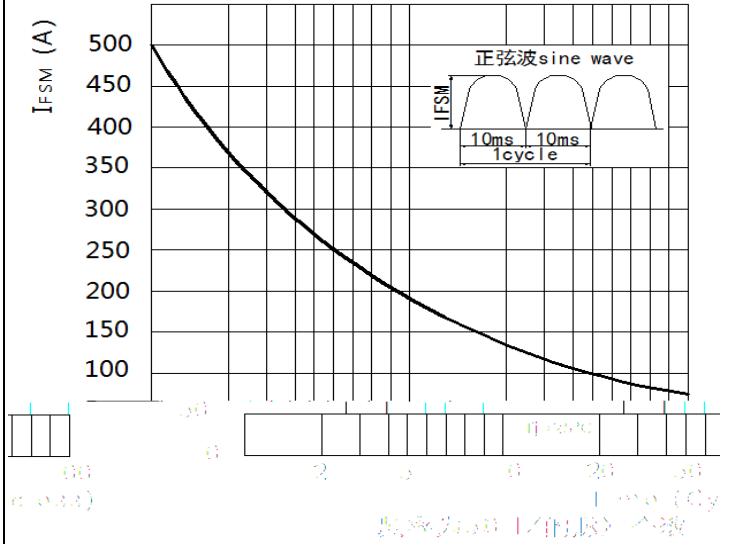

---

## Attention

1

■ M5\*12~18mm

■

■

■

■

■

■

■

■

■

■

■

■

■