



1.0A Glass Passivated Single-Phase Bridge Rectifier

/ Features		/Outline Dimensions					
Glass passivated chip Low Reverse Leakage Current High surge current capability		Case: MB*F					
/ Mechanical Data							
Case: Molded plastic case / Marking / Polarity: Marked on Body 0.09 Weight: About 0.09 grams							
/Maximum Ratings and Thermal Characteristics @ Ta = 25 unless otherwise noted							
Symbol	Characteristic	MB*F					Unit
		1	2	4	6	8	

/ Characteristics Curves

图1:  $I_o$ - $T_a$ 曲线  
FIG1:  $I_o$ - $T_a$  Curve

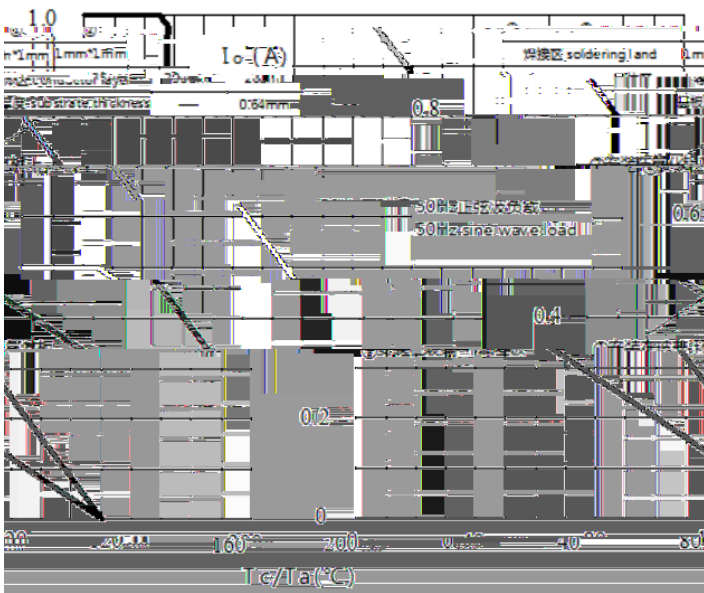


图2: 耐正向浪涌电流曲线  
FIG2: Surge Forward Current Capability

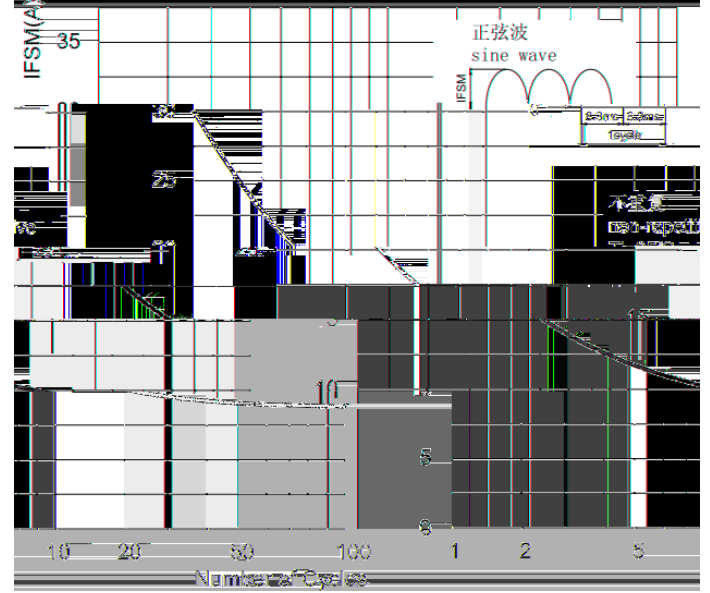


图3: 正向电压曲线  
FIG3: Forward Voltage

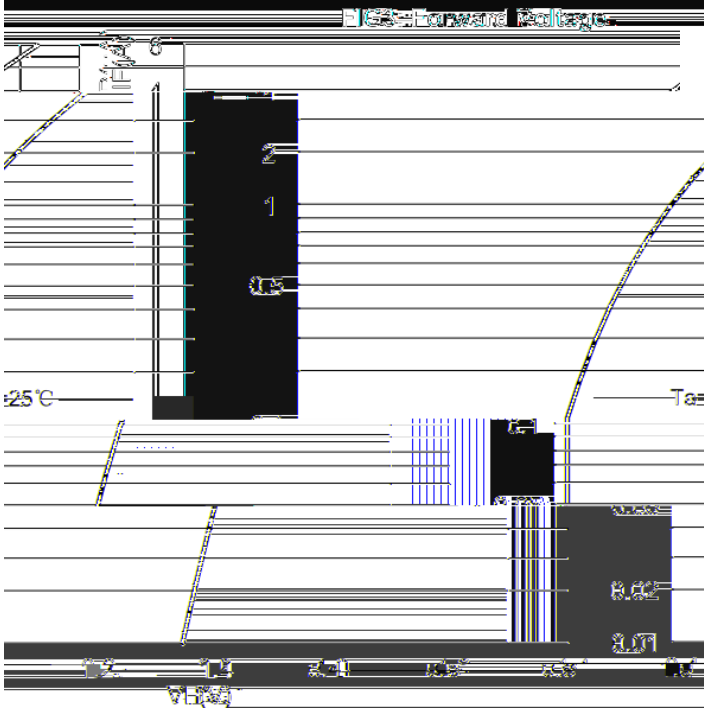


图4: 反向电流曲线  
FIG4: Typical Reverse Characteristics

